

GT-92GC

2U 19" rack mount fanless GPU computer including NVIDIA® 2000 ADA, supporting Intel® 14th / 13th / 12th-Gen Core™ processor

Key Features



- Intel® 14th/ 13th/ 12th-Gen LGA1700 processor (35W/65W)
- Fanless GPU computer with NVIDIA® RTX 2000 ADA
- 2U 19" chassis for rack-mount or wall-mount
- 8V to 48V wide-range DC input via M12 L-Coded connector
- 8x GbE PoE+, 1x GbE ports via M12 X-Coded connectors
- On-board isolated CAN bus for in-vehicle communication
- 1x M.2 2280 M key with PCIe-Gen 4x4 for NVMe storage
- 2x full-size mPCIe sockets with internal SIM sockets
- -25°C to 55°C wide-temperature fanless operation

Introduction

GT-92GC is a 19" rack mount, wide-temperature, fanless GPU computer that delivers excellent CPU and GPU performance by leveraging Intel® 14th/ 13th/ 12th-Gen platform and NVIDIA® RTX 2000 ADA. Thanks to its high-performance and flexible camera expansion, GT-92GC is ideal for multi-camera applications requiring real time responses, e.g., AI inspection, robotic guidance, and autonomous machines.

GT-92GC has a proven thermal design to guarantee reliable system operation from -25°C to 55°C. It features a passive-cooling design for the motherboard and 70W GPU card. Supporting eight GigE cameras (or IP cameras) and four USB3 cameras, GT-92GC is ideal for various vision-based AI application deployments. It also provides flexible data storage options, including one M.2 2280 Gen4x4 NVMe providing up to 7000 MB/s extreme read/write speeds and two 2.5" SATA HDD/SSD to expand storage capacity.

With performance enhancements and comprehensive I/Os, GT-92GC is the perfect edge AI inference platform for industrial environments such as inspection vehicle, smart agriculture, and autonomous machines.

Specifications

System Core		Storage Interface		
Processor	Supporting Intel® 14th-Gen Core™ CPU (LGA1700 socket, 65W/ 35W TDP) - Intel® Core™ i9-14900/ i9-14900T - Intel® Core™ i7-14700/ i7-14700T - Intel® Core™ i5-14500/ i5-14400/ i5-14500T - Intel® Core™ i3-14100/ i3-14100T	Supporting Intel® 12th-Gen Core™ CPU (LGA1700 socket, 65W/ 35W TDP) - Intel® Core™ i9-12900E/ i9-12900TE - Intel® Core™ i7-12700E/ i7-12700TE - Intel® Core™ i5-12500E/ i5-12500TE - Intel® Core™ i3-12100E/ i3-12100TE - Intel® Pentium® G7400E/ G7400TE - Intel® Celeron® G6900E/ G6900TE	SATA HDD	2x hot-swappable HDD trays for 2.5" HDD/ SSD installation, supporting RAID 0/ 1
	Supporting Intel® 13th-Gen Core™ CPU (LGA1700 socket, 65W/ 35W TDP) - Intel® Core™ i9-13900E/ i9-13900TE - Intel® Core™ i7-13700E/ i7-13700TE - Intel® Core™ i5-13500E/ i5-13400E/ i5-13500TE - Intel® Core™ i3-13100E/ i3-13100TE		M.2 NVMe	1x M.2 2280 M key NVMe socket (PCIe Gen4x4) for NVMe SSD
Chipset	Intel® R680E platform controller hub	Internal Expansion Bus		
Graphics	Integrated Intel® UHD Graphics 770 (32EU)	Mini PCI Express	2x full-size mini PCI Express socket with SIM slot	
Acceleration GPU	NVIDIA® RTX 2000 ADA	Power Supply		
Memory	Up to 64 GB ECC/ non-ECC DDR5 4800 SDRAM (two SODIMM slots)	DC Input	8V to 48V DC input (M12 L-coded)	
AMT	Supports Intel vPro/ AMT 16.0	Ignition Control	Built-in ignition power control	
TPM	Supports dTPM 2.0	Mechanical		
I/O Interface		Dimension	440mm (W) x 250mm (D) x 88mm (H) (excl. rack-mount bracket)	
Ethernet	1x GbE Ethernet by Intel I219-LM via M12 x-coded connector(with WoL) 8x GbE Ethernet by Intel I350-AM4 via M12 x-coded connectors	Weight	7.7 kg	
PoE+	8x IEEE 802.3at PoE+ PSE with - with 70 W total power budget ^[1] (12V vehicle power input) - with 100 W total power budget (24V vehicle power input)	Mounting	Rack-mounting (optional) and wall-mounting (optional)	
CAN Bus	2x isolated CAN 2.0 port, supporting SocketCAN in Linux	Environmental		
USB	4x USB 3.2 Gen2x1 (10 Gbps) ports in type-A connectors	Operating Temperature	with 35W CPU -25°C ~ 55°C ^[3] (without PoE) -25°C ~ 50°C ^[3] (with PoE 50W)	
Video Port	1x HDMI 1.4, supporting 4096x2160 resolution 1x DisplayPort, supporting 4096 x 2304 resolution	Storage Temperature	with 65W CPU -25°C ~ 35°C ^{[2][3]} (without PoE)	
Serial Port	2x isolated 3-wire RS232/ 422/ 485 port (COM1/ COM2)	Humidity	-40°C to 85°C	
Isolated DIO	4-CH isolated DI and 4-CH isolated DO	Vibration	10% to 90% , non-condensing	
Audio	1x 3.5 mm jack for mic-in and speaker-out	Shock	EN 50155:2017/ IEC 61373, Category I, Class B - Body mounted	
		EMC	EN 50121 (EN 50155 EMC) CE/FCC Class A, according to EN 55032 & EN 55035	


[1] The 12V vehicle power input system imposes a strict limit of 70W on the PoE power budget due to the high current draw caused by the voltage drop to 8V.

[2] For 65W CPUs, the recommended DC input range is 18V to 48V.


[3] For sub-zero operating temperature, a wide temperature HDD or Solid State Disk (SSD) is required.

GT-92GC

Appearance

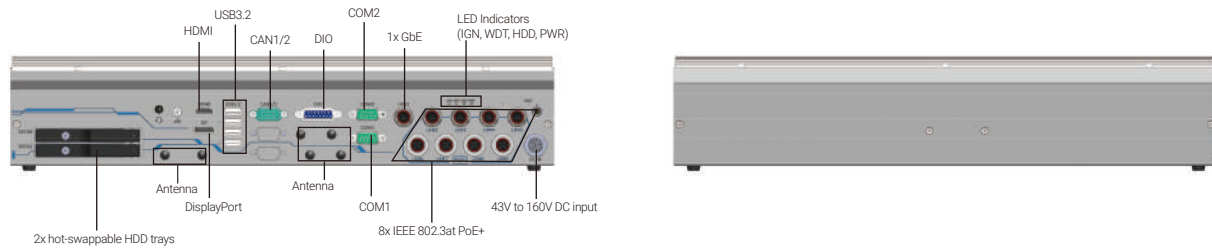

Dimensions

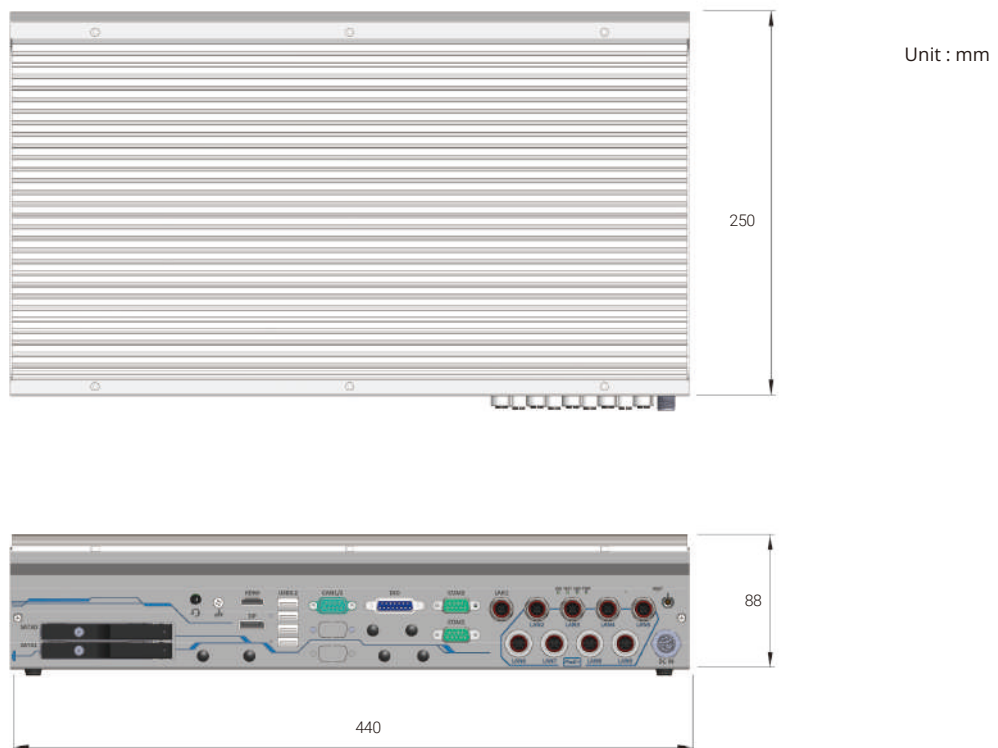





Ordering Information

Model No.	Product Description
GT-92GC	2U 19" rack mount fanless GPU computer including NVIDIA® 2000 ADA, supporting Intel® 14th / 13th / 12th-Gen Core™ processor

Optional Accessories

PA-280W-CW6P-2P	280W AC-DC power adapter 24V 11.67A, 85~264VAC, -30~+70°C w/ Wafer FML6P to 2P End Terminal cable for AWP/ SEMIL
PA-600W-C4PY-4P	600W AC-DC power adapter 24V 25A, 85~264VAC, -20~+70°C, w/ 4PY Terminal to 4P End Terminal cable for AWP/SEMIL
Cbl-M12L5F-CordEnd5-180CM	M12 L-Code 5P(FML) to Cord End Terminal 5P, Length: 180cm
Cbl-M12X8M-RJ45-CAT6A-500CM	M12(8-pole-X-coded) to RJ45, CAT6A, Length: 500CM
Cbl-DB9F-2DB9M-15CM	DB9 (Female) to 2x DB9 (Male), Length: 15CM for CAN1/2
AccsyBx-SplicingConnector	Accessory box kits for Splicing Connector 2-Pole, included 10pcs
Rmkit-GT92	Rack-mount assembly for GT-92 series
Wmkit-GT92	Wall-mount assembly for GT-92 series
mPCIe-M2B	NGFF M.2 key B to mini-PCIe adapter with dual nano-SIM slots
mPCIe-M2E	NGFF M.2 key E to mini-PCIe adapter
mPCIe-M2M	NGFF M.2 key M to mini-PCIe adapter

GT-92GC

Type	Model Name	Description
	Cbl-M12L5F-CordEnd5-180CM	M12 L-Code 5P(FML) to Cord End Terminal 5P, Length: 180cm
	Cbl-M12X8M-RJ45-CAT6A-500CM	M12(8-pole-X-coded) to RJ45, CAT6A, Length: 500CM
	Cbl-DB9F-2DB9M-15CM	DB9 (Female) to 2x DB9 (Male), Length: 15CM for CAN1/2
	AccsyBx-SplicingConnector	Accessory box kits for Splicing Connector 2-Pole, included 10pcs