

Nuvo-9531-FT Series

Intel® 13th/12th-Gen Core™ i9/ i7/ i5/ i3 Compact Fanless Computer with 4x 2.5GbE, 4x USB3.2 and 1x Hot-swappable HDD Tray and Flattop Heatsink



Key Features

- 212 x 165 x 45 mm low-profile design with flattop heatsink
- Intel® 13th/12th-Gen Core™ 65W/ 35W LGA1700 CPU
- Rugged, -25°C to 60°C fanless operation
- 4x 2.5GbE with optional PoE+ and 4x USB3.2 Gen 1 with screw-lock
- 1x M.2 2280 Gen4 x4 NVMe and 1x hot-swappable HDD tray for storage
- 4-CH isolated DI and 4-CH isolated DO
- VGA + DP dual display output
- Optional ignition power control

Introduction

Nuvo-9531-FT is a new category of fanless computer utilizing flattop heatsink for passive heat dissipation. It is designed to be installed inside a metal cabinet, waterproof box or explosion-proof case, where ventilation is limited. With the flattop heatsink and the non-adhesive thermal pad on top, heat generated by Nuvo-9531-FT can be effectively conducted to the outer surface of the cabinet to maintain optimum operating temperature.

Nuvo-9531-FT supports Intel® 13th Gen processors with up to 24 cores/ 32 threads to deliver almost double the performance when compared to previous Intel® 10th or 11th Gen platforms. It has rich I/O functions such as four 2.5GbE with optional PoE+ PSE and four USB3.2 Gen1 ports for multiple camera connectivity for machine vision and surveillance applications. In addition, it features a Gen4 x4 M.2 to support an NVMe SSD with read/ write speeds up to 7000 MB/s; a hot-swappable HDD tray to hot-swap the storage drive without turning off the system or dismantling the chassis; two mini PCIe and one M.2 E key slots to install WiFi or 5G/ 4G wireless communication modules. The system is also equipped with 8x DIO, 2x COM ports, and dual display outputs for your industrial embedded application needs.

Combining excellent computing performance, abundant I/O connections, compactness, and a unique flattop heatsink, Nuvo-9531-FT is perfect for applications deployed in a sealed cabinet or confined space, where traditional fanless computers fall short.

Specifications

System Core		Internal Expansion Bus	
Processor	Supporting Intel® 13 th -Gen Core™ CPU (LGA1700 socket, 65W/ 35W TDP)	Supporting Intel® 12 th -Gen Core™ CPU (LGA1700 socket, 65W/ 35W TDP)	Mini PCI Express
	- Intel® Core™ i9-13900E/ i9-13900TE - Intel® Core™ i7-13700E/ i7-13700TE - Intel® Core™ i5-13500E/ i5-13400E/ i5-13500TE - Intel® Core™ i3-13100E/ i3-13100TE	- Intel® Core™ i9-12900E/ i9-12900TE - Intel® Core™ i7-12700E/ i7-12700TE - Intel® Core™ i5-12500E/ i5-12500TE - Intel® Core™ i3-12100E/ i3-12100TE - Intel® Pentium® G7400E/ G7400TE - Intel® Celeron® G6900E/ G6900TE	2x full-size mini PCI Express sockets with internal SIM sockets
Chipset	Intel® H610E platform controller hub		M.2 E key
Graphics	Integrated Intel® UHD Graphics 770 (32EU) / 730 (24EU)		1x M.2 2230 E key socket for WiFi5, WiFi6 or Google Edge TPU module
Memory	Up to 32GB non-ECC DDR4 3200 SDRAM (one SODIMM slot)		Storage Interface
TPM	Supports dTPM 2.0		SATA HDD
I/O Interface			1x hot-swappable 2.5" HDD/ SSD tray for 7mm HDD/ SSD
Ethernet	4x 2.5GBASE-T Ethernet ports by Intel® I226-IT GbE controllers		M.2
PoE+	Optional IEEE 802.3at PoE+ PSE for 4x 2.5GbE ports 100 W total power budget		1x M.2 2280 M key socket (PCIe Gen4 x4) for NVMe SSD
USB 3.2	4x USB 3.2 Gen1 (5 Gbps) ports		Power Supply
USB 2.0	2x USB 2.0 ports		DC Input
Video Port (Integrated Graphics)	1x VGA output, supporting 1920 x 1200 resolution 1x DisplayPort, supporting 4096 x 2304 resolution		1x 3-pin pluggable terminal block for 8-48V DC input with optional ignition power control
Serial Port	1x software-programmable RS-232/422/485 ports (COM1) 3x 3-wire RS-232 ports (COM2/3/4) or 1x RS-422/485 port (COM2)		Mechanical
Audio	1x 3.5 mm jack for mic-in and speaker-out		Dimension
Isolated DIO	4-CH isolated DI and 4-CH isolated DO		212mm (W) x 165 mm (D) x 45 mm (H)
		Weight	
		2.4 kg	
		Mounting	
		Wall-mount (optional)	
		Environmental	
		Operating Temperature	
		with 35W CPU -25°C ~ 60°C ^{[1][2]} with 65W CPU -25°C ~ 60°C ^{[1][2]} (configured as 35W TDP)	
		Storage Temperature	
		-40°C ~ 85°C	
		Humidity	
		10%~90% , non-condensing	
		Vibration	
		MIL-STD-810H, Method 514.8, Category 4	
		Shock	
		MIL-STD-810H, Method 516.8, Procedure I	
		EMC	
		CE/FCC Class A, according to EN 55032 & EN 55035	


^[1] For sub-zero operating temperature, a wide temperature HDD or Solid State Disk (SSD) is required.

^[2] The system was tested while mounted on an aluminum panel measuring 60(W) x 60(D) x 0.3(H) cm in a high temperature environment to simulate in-cabinet conditions. For more information, please refer to the user manual.

Appearance



Dimensions

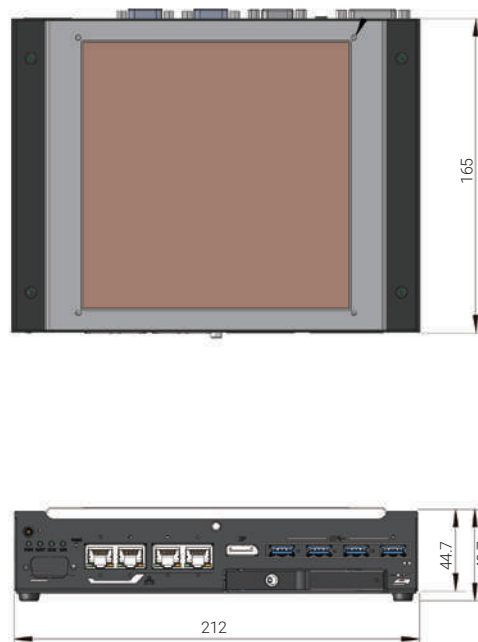

Unit : mm

Ordering Information

Model No.	Product Description
Nuvo-9531-FT	Intel® 13 th /12 th -Gen Core™ i9/ i7/ i5/ i3 compact fanless computer with 4x 2.5GbE , 4x USB3.2 Gen 1, a hot-swappable HDD tray and flattop heatsink
	<i>Optional ignition power control and 802.3at PoE+ PSE for 4x 2.5GbE ports</i>

Optional Accessories

PA-160W-OW	160W AC-DC power adapter 20V/8A; 18AWG/120cm; cord end terminals for terminal block, operating temperature: -30°C to 70°C.
PA-280W-ET2	280W AC/DC power adapter 24V/ 11.67A ; 16AWG/ 100cm ; cord end terminals for terminal block, operating temperature : -30°C to 60°C. (recommended for 65W CPU)
Wmkit-Nuvo-9531-FT	Wall mounting assembly for Nuvo-9531-FT