

# POC-40

Intel® Elkhart Lake Atom® x6211E Extreme-compact Embedded Computer



## Key Features

- Intel® Elkhart Lake Atom® x6211E dual-core processor
- 52 x 89 x 112 mm extremely compact form factor
- Rugged -25°C to 70°C fanless wide-temperature operation
- Two GigE ports, two USB 3.1 Gen1 ports and two USB2.0 ports
- M.2 2280 M key SATA storage interface
- One M.2 B key socket supporting 5G/ 4G 3042/ 3052 modules
- One M.2 E key socket for WiFi 5/ WiFi 6 modules
- One COM port with RS-232/ 422/ 485 modes and three RS-232 COM ports

## Introduction

POC-40 is an extremely compact fanless computer with dimensions measuring just 52 x 89 x 112 mm. It features Elkhart Lake Atom® processor and is designed for space-restricted applications such as factory data collection, rugged edge computing and mobile gateway.


Utilizing Intel's 10nm process technology, the new Elkhart Lake Atom® x6211E dual-core processor can deliver up to 1.8 times the performance boost over its previous generation. In comparison to POC-200, POC-40 provides 1.9 times computing performance at only half the size. It features generic I/O functions, such as two Gigabit Ethernet ports, four USB 3.1 Gen1/ 2.0 ports, four COM ports and optional isolated digital I/Os for industrial communication and control. In addition, by adopting dedicated M.2 B key and E key slots, the POC-40 can fully harness the bandwidth of 5G and WiFi 6 wireless communications to provide wide-area coverage and real-time data transmission for industrial and mobile gateway applications.

With a similar footprint as a PICO-ITX motherboard, Neosys' POC-40 is perfect for projects that require above par performance in an extremely compact package. Ideal for both edge computing and gateway applications, it is a low power consumption and lightweight fanless computer that offers wide-temperature operation for harsh environments.


## Specifications

System Core		Internal Expansion Bus	
Processor	Intel® Elkhart Lake Atom® x6211E dual-core 1.3GHz/ 3.0GHz 6W processor	M.2 B key	1x M.2 3042/ 3052 B key socket with internal SIM socket for 4G/ 5G module
Graphics	Integrated Intel® UHD Graphics	M.2 E key	1x M.2 2230 E key socket for WiFi 5/ WiFi 6 module
Memory	Up to 32 GB DDR4-3200 SDRAM (one SODIMM slot)	<b>Power Supply</b>	
<b>Panel I/O Interface</b>		DC Input	1x 4-pin pluggable terminal block for 12-20V DC input
Ethernet	2x Gigabit Ethernet ports by Intel® I210 GbE controllers	Remote Ctrl. & LED Output	1x 4-pin pluggable terminal block for remote control
USB 3.1	2x USB 3.1 Gen1 (5 Gbps) ports	<b>Mechanical</b>	
USB 2.0	2x USB 2.0 ports	Dimension	52 mm (W) x 89 mm (D) x 112 mm (H)
Video Port	1x DisplayPort connector, supporting 4096 x 2160 resolution @ 60Hz	Weight	0.6 kg
Serial Port	1x software-programmable RS-232/ 422/ 485 port (COM1) 3x 3-wire RS-232 ports (COM2/COM3/COM4)	Mounting	DIN-rail mount (standard) or Wall-mount (optional)
Isolated Digital I/O	Optional 4-ch isolated digital input and 4-ch isolated digital output	<b>Environmental</b>	
<b>Storage Interface</b>		Operating Temperature	-25°C ~ 70°C
M.2	1x M.2 2280 M key SATA interface	Storage Temperature	-40°C ~ 85°C
		Humidity	10%~90% , non-condensing
		Vibration	Operating, MIL-STD-810G, Method 514.6, Category 4
		Shock	Operating, MIL-STD-810G, Method 516.6, Procedure I, Table 516.6-II
		EMC	CE/FCC Class A, according to EN 55032 & EN 55024

## Appearance

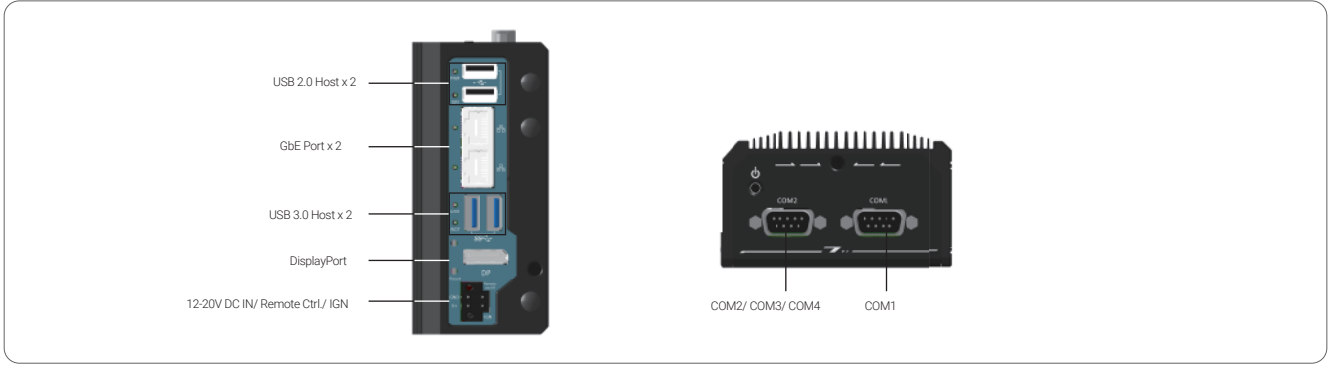

## Dimensions

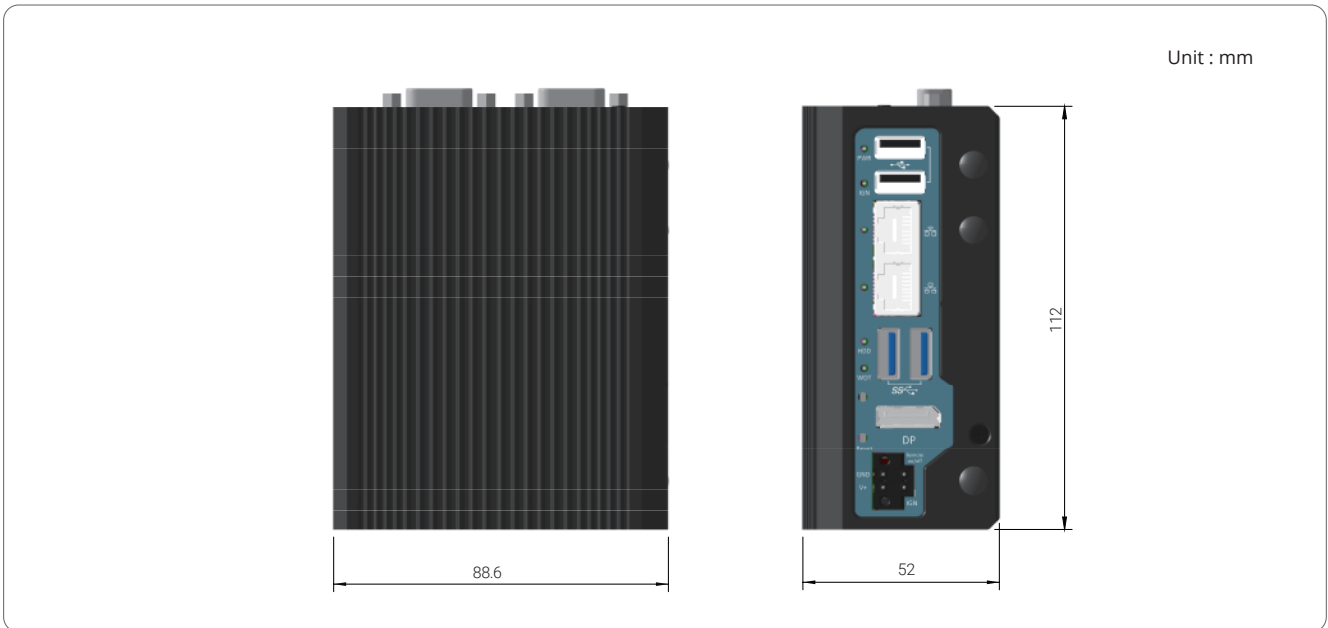

## Ordering Information

Model No.	Product Description
POC-40	Intel® Elkhart Lake Atom® x6211E Extreme-compact Embedded Computer

## Optional Accessories

PA-60W-OW	60W AC/DC power adapter with 12V, 5A DC output, cord end terminals for terminal block. Operating temperature : -30 to 60 °C
-----------	---