


DU-5K-FSR-OEM

OEM Keyboard DU-5K-FSR-OEM

The DU-5K-FSR-OEM from iKey® features the newly improved integrated force sensing resistor pointing device, 24 function keys and a 10-key numeric pad. It is designed to meet NEMA 4X specifications when properly installed. This product is for OEM use.

Features:

- 10-Key Numeric Pad
- Industrial Silicone Rubber Keypad
- Integrated Force Sensing Resistor(FSR) Pointing Device
- Meets NEMA 4X (IP65) Specifications
- PS/2 or USB configurations available

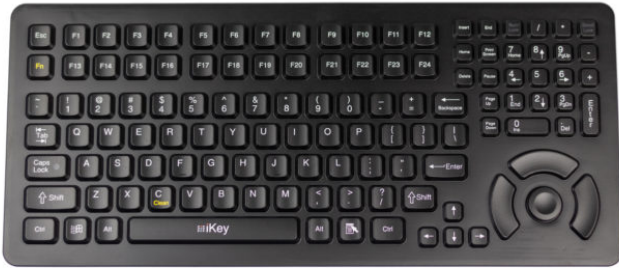

Product Code DU-5K-FSR-OEM

CERTIFICATIONS	NEMA 4X, CE UL60950, FCC Part 15, Class B
SHOCK	3 x 11 ms pulses of 50g on each of 3 axis
CABLE	LENGTH: 10 feet (3 meters) DESIGN: "Y" PS/2 or AT/serial Cable (providing separate keyboard and mouse connections), or Single-Cable USB
KEY SWITCH	MATERIAL: Industrial Silicone Rubber LIFE: Greater than 10 Million Cycles TRAVEL: 0.055 in. ACTUATION FORCE: 180g FEEDBACK: Tactile with Mechanical Snap
VIBRATION	POWER SPECTRAL DENSITY: .04g/HZ FREQUENCY RANGE: 20Hz-2Khz DURATION OF TEST PER AXIS: 3 hours
POWER	PS/2: KEYBOARD: 50mA@5V (from Keyboard port) POINTER: 35mA@5V (from Mouse port) USB: 85mA@5V (from CPU port)
COMPATIBILITY	PS/2: All Windows Operating Systems USB: All Windows and Macintosh OS
TEMPERATURE RANGE	STORAGE: -40C to 85C (-40F to +185F) OPERATING: -20C to 60C (-4F to +140F)
WEIGHT	1.50 lbs (0.68 kg)
WARRANTY	90 day limited warranty
HUMIDITY	100% Humidity Resistant
DIMENSIONS	14.75" x 6.43" x 0.35" (w-h-d) 374.7mm x 163.3mm x 8.9mm
MODEL NUMBERS	DU-5K-FSR-OEM-PS2: With PS/2 cable DU-5K-FSR-OEM-USB: With USB cable